




## ISOLMANT FASCIA PERIMETRALE PRACTICAL

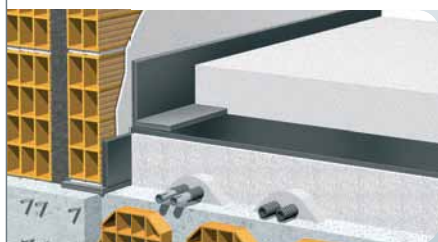

Polyethylene foam non cross-linked adhesive strips: height 15 cm, pre-moulded for easier folding.

### ■ THICKNESS

Approx. 5 mm.

### ■ SOUNDPROOFING

Not using Isolmant Fascia Perimetrale causes an acoustic bridge to be formed, which may result in the loss of many decibels.

### ■ METHODS OF USE

- After stripping the adhesive part of Isolmant Fascia Perimetrale using the pre-moulded fold, apply for approx. 5 cm under the floor (or on the laid mat) and for the remaining cm on the wall.
- The excess part should be trimmed with a cutter after the final floor finish has been laid and grouted.

### ■ PACKAGING

In rolls with 10 reels of 50 linear m/each

**isolmant** FasciaPRM

### WARNING:

This technical data sheet is not a valid specification. It is up to the user to establish whether the product is suitable for the intended use.

### FIELDS OF USE

Isolmant Fascia Perimetrale is essential when soundproofing floors to prevent vibration from being transferred to the partition wall. It is particularly recommended with thick insulating layers and materials that do not allow easy wall return. It can replace the elastic material normally used for expansion joints.

### SPECIFICATION

“Practical” polyethylene foam, non cross-linked adhesive perimeter strip, pre-moulded for easier laying.  
Height 15 cm, supplied in rolls with 10 reels of 50 linear m/each  
Thickness approx. 5 mm.

NEW OFFICES!



bigger, more services

### TECNASFALTI

Via dell'Industria 12, Località Francolino  
20080 Carpiano (Mi) Tel. +39 02 9885701  
Fax +39 02 98855702 clienti@isolmant.it  
www.isolmant.it