




ISOLMANT FASCIA PERIMETRALE RADIANT

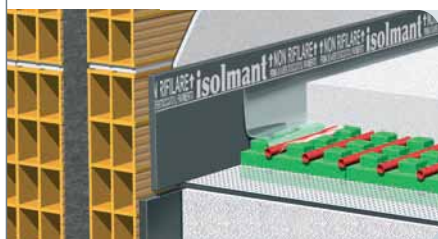

Strips with “detach and attach” adhesive, height: 15 cm made of Isolmant silk-screen printed with laying instructions and a layer of polyethylene for overlapping onto the radiant panel.

THICKNESS

Approx. 5 mm.

PHYSICAL BEHAVIOUR

Not using Isolmant Fascia Perimetrale causes an acoustic and thermal bridge to be formed, which may jeopardise soundproofing performance and the panel heating system.

METHODS OF USE

- Use the “detach and attach” adhesive to fix the strip to the wall, making sure it sticks well to the soundproofing mat beneath.
- Use the heating coil to fit the layer of polyethylene which protrudes from the strip itself in place, fixing it to the thermal panel.
- Take care to fix the thermal panel to the strip completely, without leaving any room between the two for cement material to enter during the casting phase.
- Only cut off the excess part after laying and plastering the flooring, before applying the skirting board.

PACKAGING

In rolls with 10 reels of 50 linear m/each

isolmant FasciaPRM

WARNING:

This technical data sheet is not a valid specification. It is up to the user to establish whether the product is suitable for the intended use.

FIELDS OF USE

Isolmant Fascia Perimetrale is essential in order to prevent vibrations from being transferred to the partition wall. It is particularly recommended with thick insulating layers and materials that do not allow easy wall return. It can replace the elastic material normally used for expansion joints. In the case of radiant screeds, it also acts as an expansion joint and is used for thermal cutting.

SPECIFICATION

Adhesive strip for soundproofing the perimeter of foundations with a floor heating system made of closed-cell, physically cross-linked polyethylene foam with a density of approx. 30 kg/m³. Height: 15 cm, supplied in rolls with 10 reels of 50 linear m/each Thickness approx. 5 mm.

NEW OFFICES!

+ bigger, more services

TECNASFALTI

Via dell'Industria 12, Località Francolino
20080 Carpiano (Mi) Tel. +39 02 9885701
Fax +39 02 9885702 clienti@isolmant.it
www.isolmant.it