


## ISOLMANT FASCIA PERIMETRALE DETACH/ATTACH - SEMI-ADHESIVE

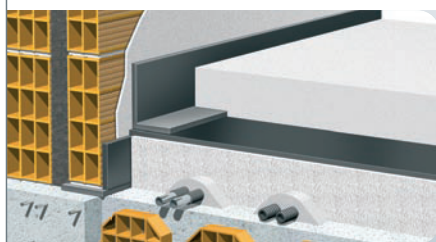

Adhesive strips: height 15 cm made of Isolmant 3 mm available in two versions:

- "detach and attach" with adhesive;
- with 5 cm of adhesive material and 10 cm of non-adhesive material.

### THICKNESS

Approx. 3 mm.

### SOUNDPROOFING

Not using Isolmant Fascia Perimetrale causes an acoustic bridge to be formed, which may result in the loss of many decibels.

### METHODS OF USE

- Use the detach/attach adhesive to stick the strips to the wall and to the floor or the insulating material at the bottom (detach and attach version).
- Use the 5 cm of adhesive material for horizontal fixing (preferably on rolls of Isolant used as underfloor soundproofing) and turn up the 10 cm on the vertical wall, overlapping the levels of the finished floor (semi-adhesive version).
- Only cut off the excess part after laying the flooring, before applying the skirting board.

### PACKAGING

In rolls with 10 reels of 100 linear m/each

**isolmant** FasciaPRM

### WARNING:

This technical data sheet is not a valid specification. It is up to the user to establish whether the product is suitable for the intended use.

### FIELDS OF USE

Isolmant Fascia Perimetrale is essential when soundproofing floors to prevent vibration from being transferred to the partition wall. It is particularly recommended with thick insulating layers and materials that do not allow easy wall return. It can replace the elastic material normally used for expansion joints.

### SPECIFICATION

Adhesive strip for perimeter soundproofing, made of closed-cell, physically cross-linked polyethylene foam with a density of approx. 30 kg/m<sup>3</sup>.  
Height: 15 cm, supplied in rolls with 10 reels of 100 linear m/each  
Thickness approx. 3 mm.

NEW OFFICES!



**bigger, more services**

### TECNASFALTI

Via dell'Industria 12, Località Francolino  
20080 Carpiano (Mi) Tel. +39 02 9885701  
Fax +39 02 98855702 clienti@isolmant.it  
[www.isolmant.it](http://www.isolmant.it)