




ISOLMANT FASCIA NASTRO

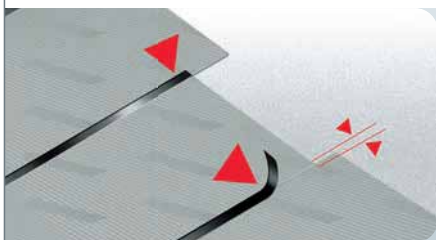

Adhesive strip composed of Isolmant with a height of 7.5 cm.

■ THICKNESS

Approx. 3 mm.

■ SOUNDPROOFING

Not using Isolmant Fascia Nastro may cause the loss of decibels through the acoustic bridge which is generated between the various layers of Isolant if they are not correctly sealed together.

■ METHODS OF USE

After stripping the adhesive part of Isolmant Fascia Nastro, apply it by cutting it to size as required, using a normal construction site cutter.

■ ROLL DIMENSIONS

1.5 m x 50 m (h x L) equal to 20 strips per 1,000 linear metres.
Minimum purchase 4 strips (200 linear m).

isolmant Fascia Nastro

WARNING:

This technical data sheet is not a valid specification. It is up to the user to establish whether the product is suitable for the intended use.

FIELDS OF USE

Ideal for sealing sheets of Isolmant together (especially in the case of sheets without adhesive overlapping flaps) since it provides a barrier against noise and humidity, Isolmant Fascia Nastro ensures continuity for the floating floor. It guarantees the continuity of the protective layer from rising damp. In addition, it can be used for all those small "acoustic patches" that are required before the cement screed is laid.

SPECIFICATION

Adhesive strip for acoustic sealing purposes, made from closed-cell, expanded, physically cross-linked polyethylene foam with density of approximately 30 kg/m³, supplied in rolls of height 7.5 cm.
Thickness approx. 3 mm.

NEW OFFICES!



bigger, more services

TECNASFALTI

Via dell'Industria 12, Località Francolino
20080 Carpiano (Mi) Tel. +39 02 9885701
Fax +39 02 98855702 clienti@isolmant.it
www.isolmant.it